





A Comprehensive Guide Through the WR67 User Interface.

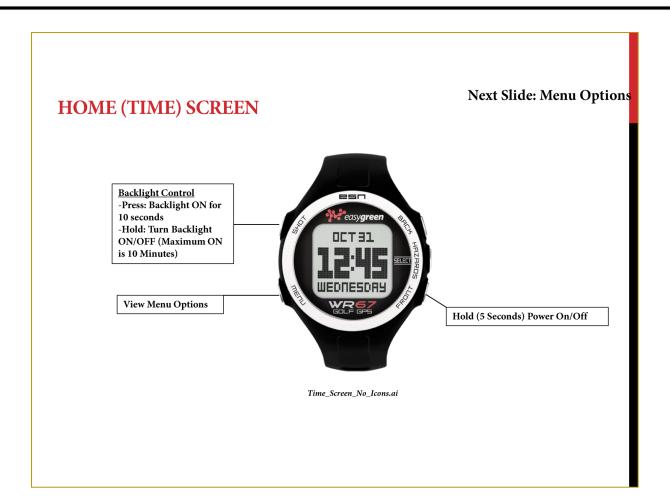

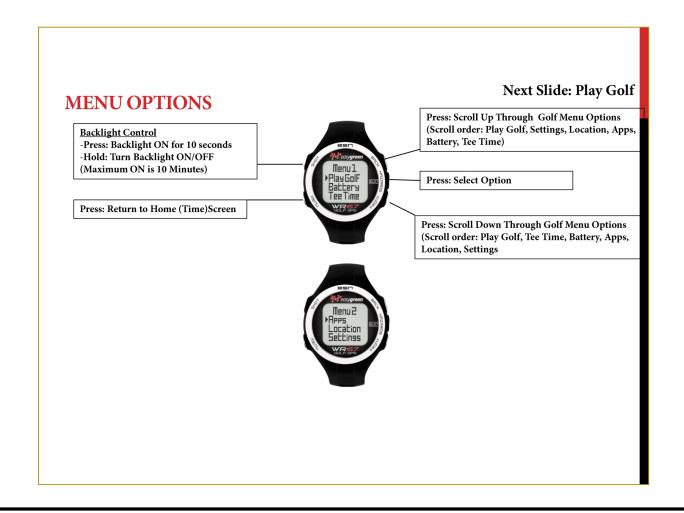

Next Slide: Round Info PLAY GOLF Shot Distance Feature (Will Function Identically To WR62 Watch Large Back of Green Callout Toggle Between Golf Menu And FCB Screen Toggle between Hazards and FCB Page *Golf Menu Includes: -Battery - Select Hole (*Note: when this option is **Large Front of Green Callout** selected, it should bring up the current hole) *No hold function: Cannot Power -Exit Game Off In Play Golf Mode. FCB.ai *Note: Backlight is disabled in Play Golf Mode.


ROUND INFO

for the round. Press any button to exit the Round Info screen and return to the Home (Time) Screen, or automatically return to the Home (Time) screen after 10 seconds.



Next Slide: Battery

FCB.ai





BATTERY

Backlight Control

Next Slide: Tee Time

Press: Return to Home (Time) Screen

-Press: Backlight ON for 10 seconds -Hold: Turn Backlight ON/OFF (Maximum ON is 10 Minutes)



Battery.ai

* Note: The watch should be able to connect from this screen. We would like to use the same charging screen as the Neo X firmware (with the scrolling battery icon).

TEE TIME

Backlight Control

- -Press: Backlight ON for 10 seconds -Hold: Turn Backlight ON/OFF
- (Maximum ON is 10 Minutes)



Home (Time) Screen With Tee Time Set

Press: Return to Home (Time) Screen



Set_Tee_Time.ai

Tee Time

.2:15 pm

Next Slide: Apps

Press: Toggle Active Field (Month, Day, Hour, Minute, AM/PM) Up.

Toggle Flag ON/OFF (With No Fields Active)


1st Press: Activate Day, 2nd Press: Activate Hour, 3rd Press: Activate Minute, 4th Press: Activate AM/PM 5th Press: Tee Time Set (Flag Icon Will Appear) *Note: Active Fields


When Set: Use ▲ To Toggle Tee Time (Flag Icon) ON/OFF (Flag icon appears on Home (Time) screen also.


Tee Time Will Automatically Enter Play Golf Mode And Acquire GPS Signal 7 minutes Prior To The Set Time, On The Set Day. The User Should Be Able To Set The Tee Time Up To 7 Days In Advance, So This Function Will Need To Work In **Accordance With The Current Date**


Press: Toggle Active Field (Month, Day, Hour, Minute, AM/PM) Down


* Note: The time area on this screen is dependent upon Time Format setting (12 hour or 24 hour)

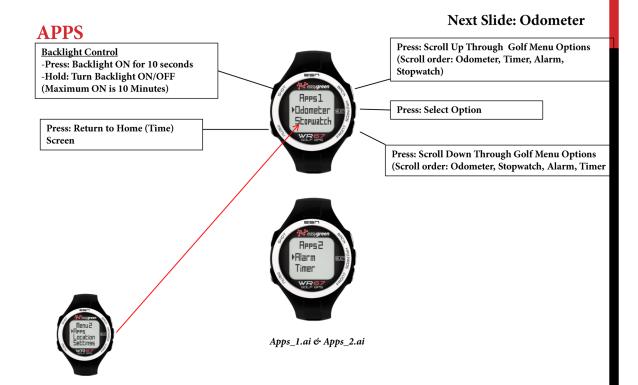


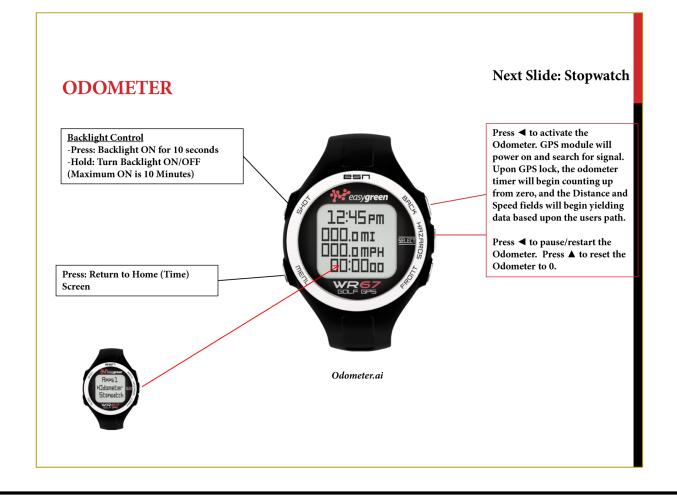


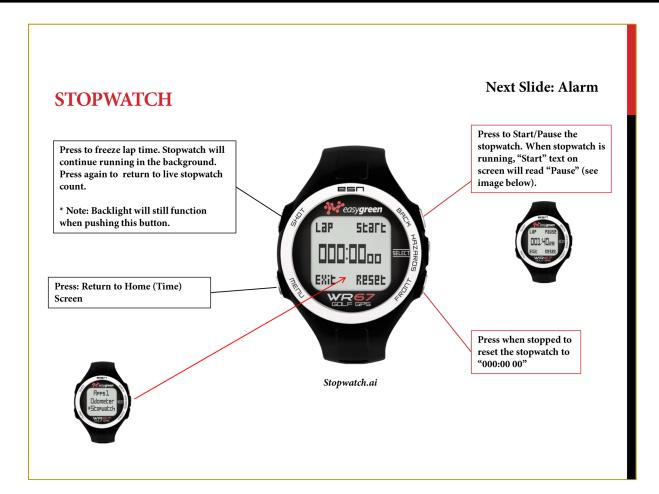


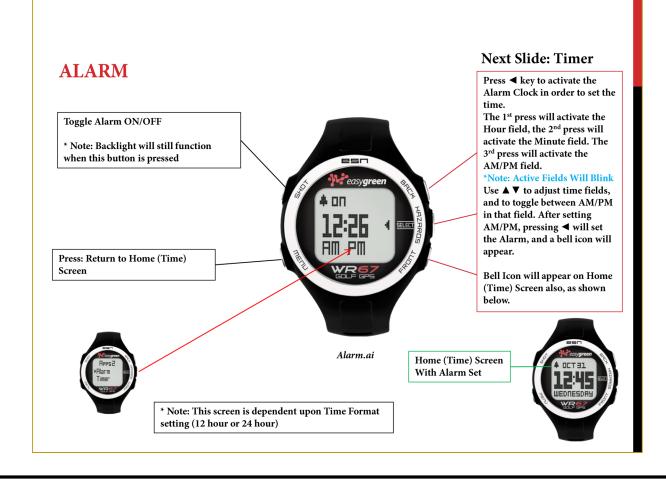


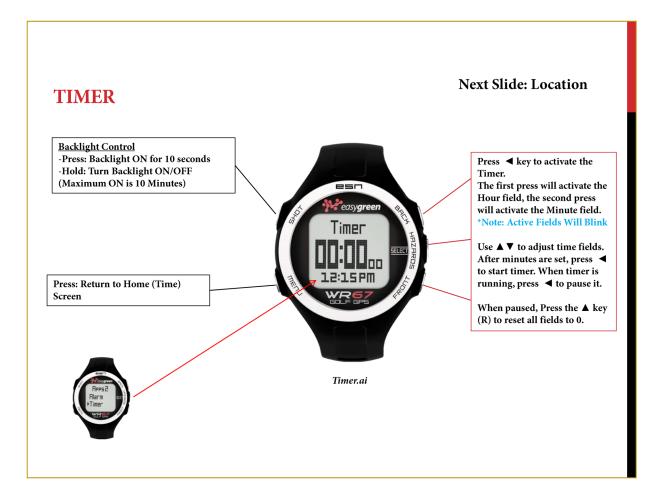


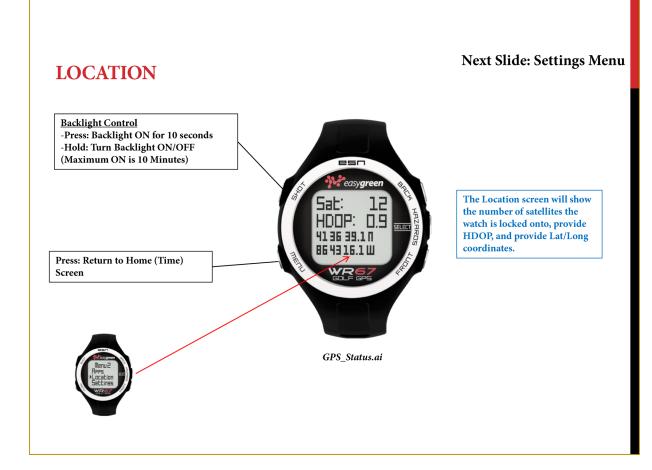


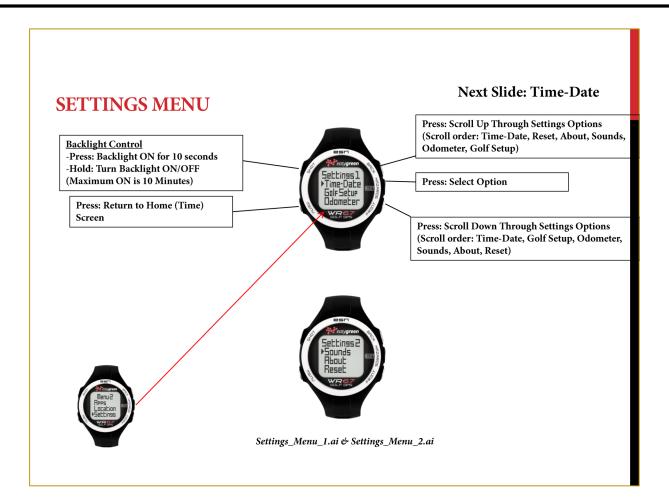


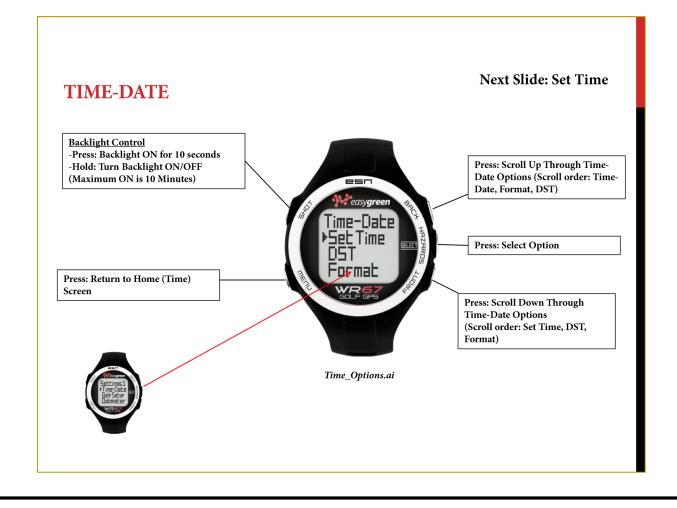


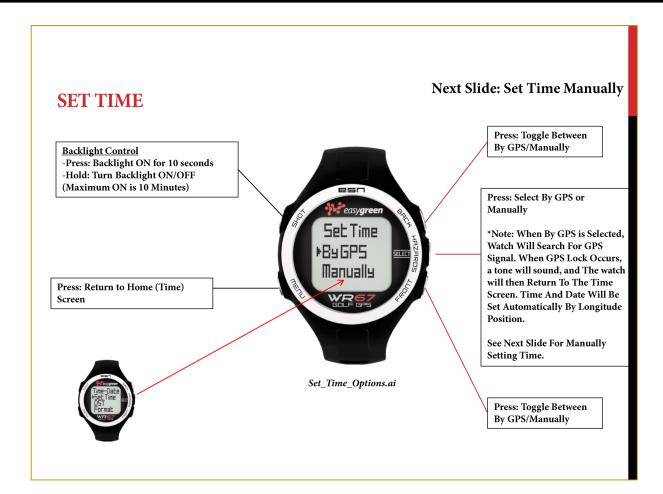


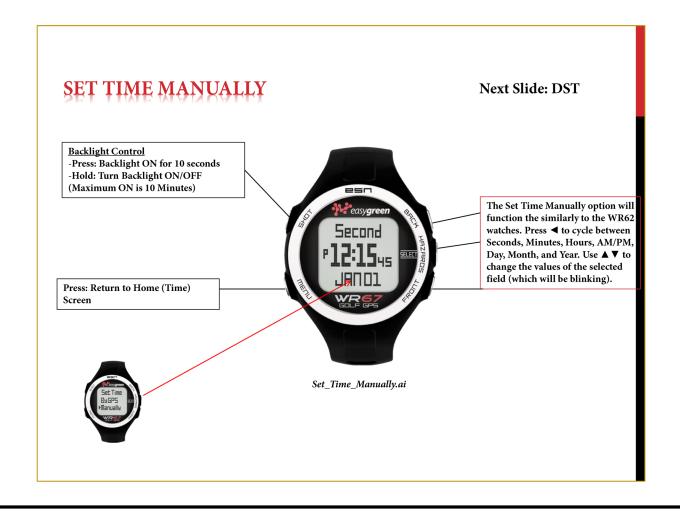


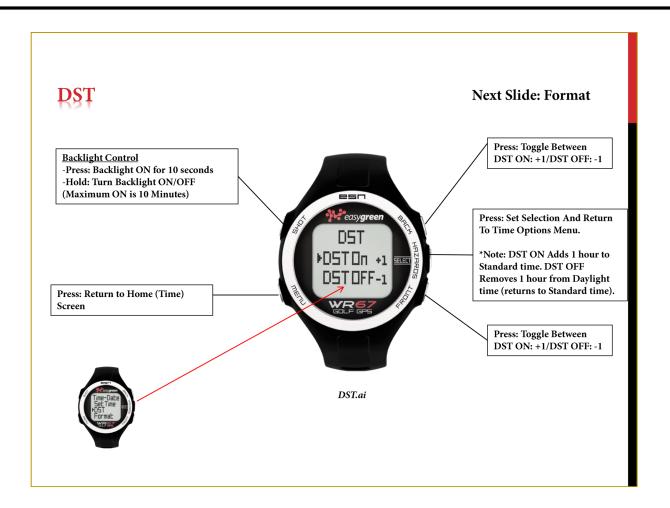


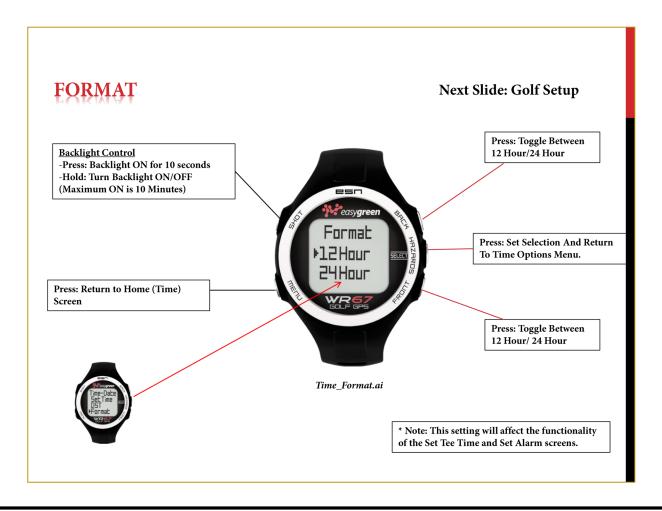


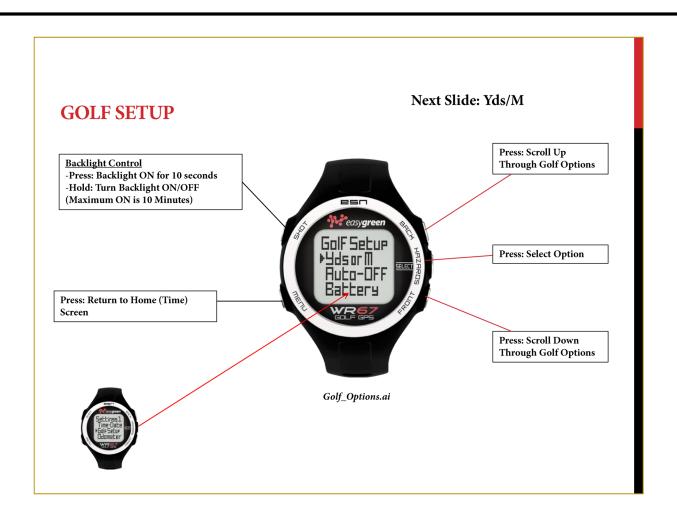


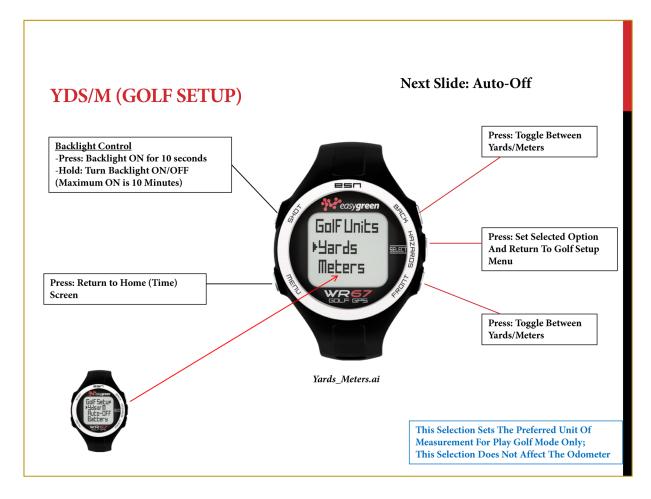

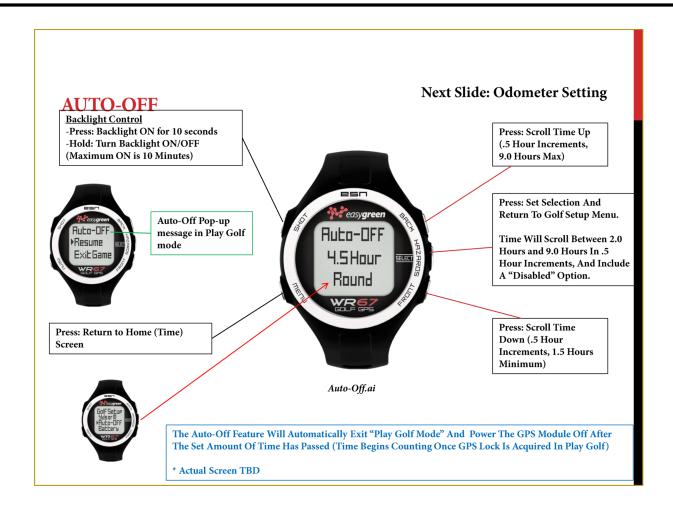

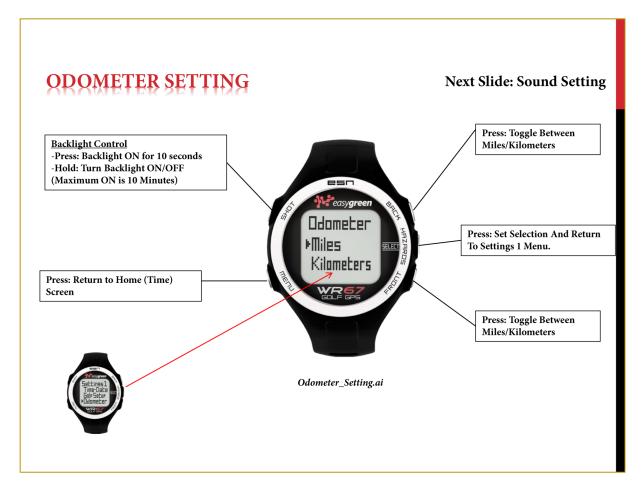

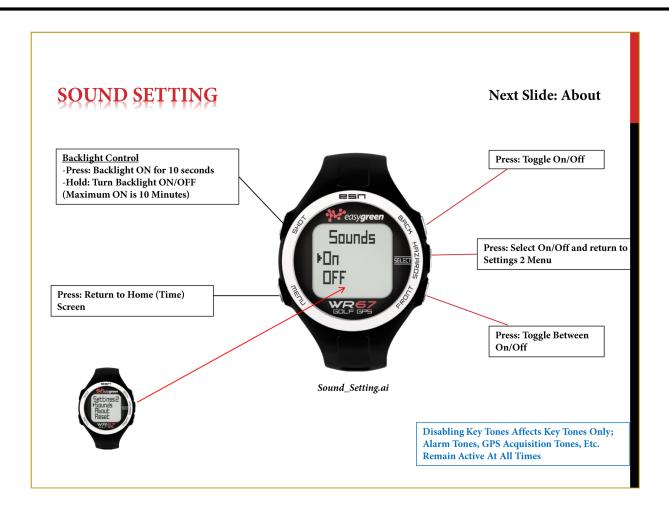

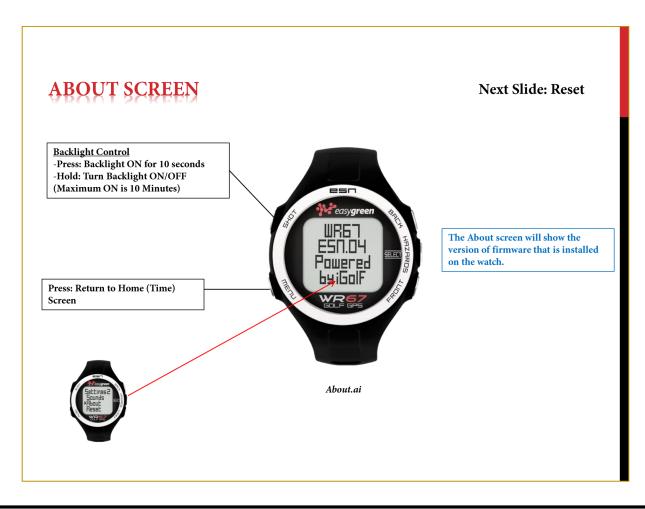

RESET SCREEN Press: Toggle Between **Backlight Control** Reset/Cancel -Press: Backlight ON for 10 seconds -Hold: Turn Backlight ON/OFF (Maximum ON is 10 Minutes) Deraults **Press: Set Selection And Return ▶**Reset To the Settings 2 Menu. Cancel Press: Return to Home (Time) Screen **Press: Toggle Between** Reset/Cancel System_Reset.ai **Selecting Reset Will Reset Default Settings**



